

Spec of Alarm Card & Alarm Box

Overview


Alarm card and alarm box is working with PC DVR to detect sensor input and control relay outputs.

Models:

AL0808: alarm box, supports 8 sensor inputs and 8 alarm relay outputs;

AL1608: alarm box, supports 16 sensor inputs and 8 alarm relay outputs;

AL0804: alarm card, supports 8 sensor inputs and 4 alarm relay outputs, with built-in watchdog function;

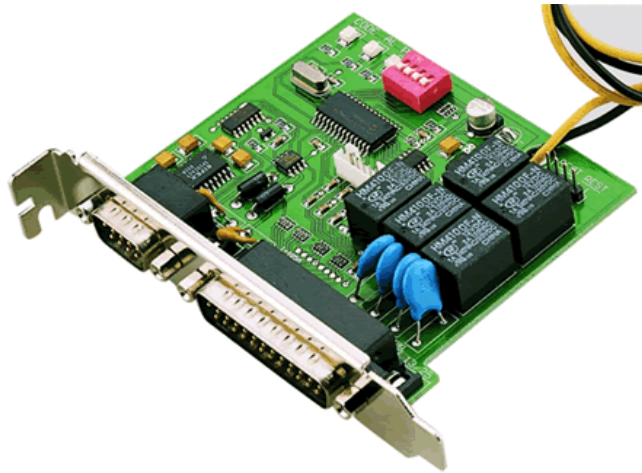

Alarm card



Alarm box

Specification:

	AL0808	AL1608	AL0804
Power Voltage	DC12V, DVR		
Power Consumption	5W	5W	1W
Communication	RS232\RS485	RS232\RS485	RS232
RS485 Output			SINGLE-DUPLEX,1200M

Baud rate	9600		
Alarm Input	8	16	8
Alarm Mode	Open	Open	Close
Alarm Output	8	8	4
Switch Input	AC220V/2A		
Alarm Linkage Mode	Host control		
Communication Mode With Host	Host Ask		
Watch-dog interval	150ms		1-200s
Setting	Built-in		
Dimension(mm)	216×125×30		115×80×15
Weight (kg)	1.5	1.5	0.32